



TECHNICAL DATA SHEET

UE Base Tube STD

Article code : PFPTBA007101

The UE Base Tube STD is compact, very efficient, and silent, thanks to its high technology centrifugal fan. It's perfectly suitable for use in theatre, opera and TV. The control for the change of speed and effects is manual for the standard version. It is equipped with professional connections, and a resettable fuse.

NOMENCLATURE:

- 1 x UE Base Tube STD
- 1 x PowerCon cable 2m



TECHNICAL SPECIFICATIONS:


Dimensions: L 37 x W 48 x H 52 cm
Weight: 8.4 Kg

Electrical characteristics:
230V – 50/60Hz – 230W – 1.7A – IP 54

Connection IN/OUT with plug PowerCon

CHARACTERISTICS :

Loudness 65 dB / 3m indoor.
Loudness 60 dB / 3m outdoor.
Bracket for hanging.
Possibility to place on the ground or with the bracket under.
Selective button 4 speeds.
Output speed of the wind 83km/h.

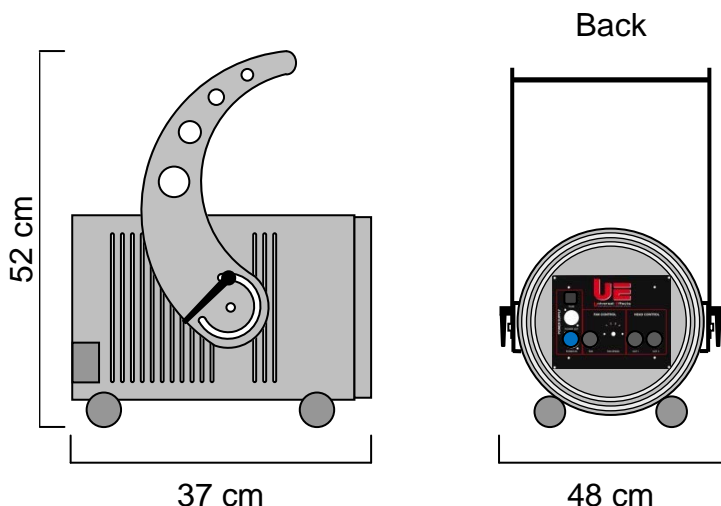

AVAILABLE HEADS :

- | | |
|------------------------|-------------------------|
| UE Head Foam Tube | UE Head Projection Tube |
| UE Head Snow Tube | UE Head Wind Tube |
| UE Head Bubble Tube | UE Head Striptease Tube |
| UE Head Fragrance Tube | UE Head AirFlame Tube |
| | Light |

OPTIONAL ACCESSORIES:

- UE Ground Foot Tube

Made in ALUMINIUM and INOX, the UE Base Tube STD is made to last. Each item has been selected for its quality and efficacy.

Universal-Effects, Technology Made in France Quality

Universal-Effects Europe – Parc de l'Èvènement, 1 Allée d'Effiat, 91160 LONGJUMEAU – FRANCE
Factory & Delivery : Universal-Effects Manufacture – 87 Route de Montcenis, 71200 LE CREUSOT – FRANCE
Office +33 (0)385 730 747 – Fax +33 (0)385 730 745 – Email info@universal-effects.com – www.universal-effects.com



TECHNICAL DATA SHEET

UE Base Tube DMX

Article code : PFPTBA007111



The UE Base Tube DMX is compact, very efficient, and very silent, thanks to its high technology centrifugal fan. It's perfectly suitable for use in theatre, opera and TV. Electronic local control or DMX control for the speed variation and effects, for the DMX version. It is equipped with professional connections, and a resettable fuse.

NOMENCLATURE :

- 1 x UE Base Tube DMX
- 1 x PowerCon cable 2m



Back

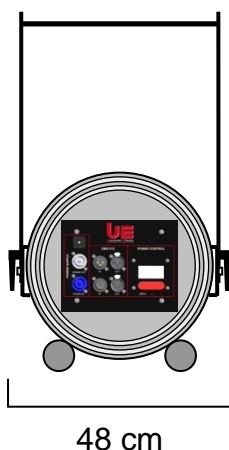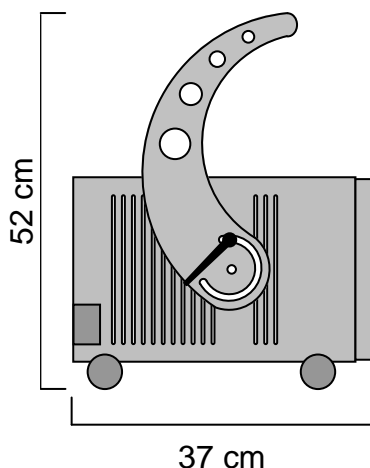

TECHNICAL SPECIFICATIONS:

Dimensions : L 37 x W 48 x H 52 cm
Weight : 9.2 Kg

Electrical characteristics:
230V – 50/60Hz – 230W – 1.7A – IP 54

Connection IN/OUT with plug PowerCon

CHARACTERISTICS :

Loudness 65 dB / 3m indoor.
Loudness 60 dB / 3m outdoor.
Bracket for hanging.
Possibility to place on the ground or with the bracket under.
Electronic speed variation
Integrated electronic control with Timer and DMX.
Output speed of the wind 83km/h.

AVAILABLE HEADS :

UE Head Foam Tube	UE Head Projection Tube
UE Head Snow Tube	UE Head Wind Tube
UE Head Bubble Tube	UE Head Striptease Tube
UE Head Fragrance Tube	UE Head AirFlame Tube
	Light

OPTIONAL ACCESSORIES:

- UE Ground Foot Tube

Made in ALUMINIUM and INOX, The UE Base Tube DMX is made to last. Each item has been selected for its quality and efficacy.

Universal-Effects, Technology Made in France Quality

Universal-Effects Europe – Parc de l'Èvènement, 1 Allée d'Effiat, 91160 LONGJUMEAU – FRANCE
Factory & Delivery : Universal-Effects Manufacture – 87 Route de Montcenis, 71200 LE CREUSOT – FRANCE
Office +33 (0)385 730 747 – Fax +33 (0)385 730 745 – Email info@universal-effects.com – www.universal-effects.com



TECHNICAL DATA SHEET


UE Head Foam Tube

Article code: PFPTME007010

The UE Head Foam Tube is directly connected to the water network with an automatic mixer by the Ventury suction system. Designed for easy operation, low noise and highly reliable, it is the ideal partner for small-scale events. The machine is delivered with its own support and 5L case, 2 pipes (10m and 15m) and a fast connection independent device.

NOMENCLATURE:

- 1 x UE Head Foam Tube
- 1 x Fluid tank 5 L
- 2 x connection pipes + quick connector

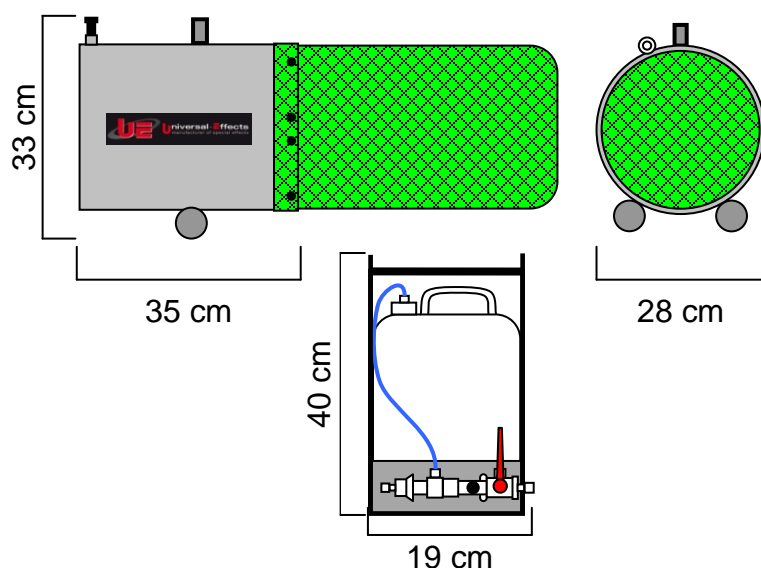

TECHNICAL SPECIFICATIONS:

Dimensions: L 35 x W 28 x H 33 cm
Weight: 8.8 Kg

CHARACTERISTICS:

Injection of foam liquid by Venturi system
Production of foam: 30m²/min
Consumption of XT-Power Foam Fluid CC (concentrated Foam fluid) : 10 L/h.
Direct connection to the water supply network
The ideal requested water pressure is 3 Bar.
Minimum pressure of 1 Bar.
Maximum pressure of 5 Bar.

CONSUMABLES:

XT- Foam Fluid LC
XT- Foam Fluid CC
XT- Foam Fluid HC

OPTIONAL ACCESSORIES:

- UE Extended Pipe Tube

Made in ALUMINIUM and INOX, The UE Head Foam Tube is made to last. Each item has been selected for its quality and efficacy

Universal-Effects, Technology Made in France Quality

Universal-Effects Europe – Parc de l'Èvènement, 1 Allée d'Effiat, 91160 LONGJUMEAU – FRANCE
Factory & Delivery : Universal-Effects Manufacture – 87 Route de Montcenis, 71200 LE CREUSOT – FRANCE
Office +33 (0)385 730 747 – Fax +33 (0)385 730 745 – Email info@universal-effects.com – www.universal-effects.com