



Freezefog Pro – Low Smoke Machine

Dramatic low-lying fog



Features:

- Dramatic long hanging low fog
- Dry, white, water based effect
- Smoke output up to 41000 cbm/hr
- Continuous output
- Modular quick disconnect fitting for LC02
- Use with low or high pressure CO2
- Use in conjunction with G300, GForce 2, GForce 3
- Available with road case
- Warranty – 12 months

Le Maitre's Freezefog Pro creates a powerful, controllable, low-lying smoke effect or fog curtain when used in conjunction with G300, GForce-2 or GForce-3 and specially formulated Le Maitre low smoke fluid.

Le Maitre's Freezefog Pro is the original Low Smoke Generator or LSG, demanded by theatres, film sets, clubs, tours and theme parks around the globe for its ability to produce thick, dry, low-lying, white smoke.

Control & Programming

- Use with G300, GForce-2 or GForce-3
- Via smoke machine - 2 channel DMX or optional Hand Held Remote
- Use in conjunction with low pressure or high pressure liquid CO2
- Automatic and continual flow control of smoke machines: An extremely high accuracy thermal monitoring system combined with the microprocessor control and a highly stable patented heat exchanger, allows a self-management system to automatically adjust the flow rate for maximum conditions at any temperature.

Performance

- Output (max): 41000 cubic metres/hr
- Warm up time as per smoke machines 6 - 8 mins
- Operating Time: Continuous with automatic level adjustment
- Reheat time – none
- Fluid consumption 59cc/minute
- Tested and safe for use on live stage performances

Freezefog Pro Low Smoke Machine (continued)

Fluids

- Low Smoke Fluid: Creates a thick odourless cloud of fog with a short hang time. In conjunction with the CO2 it creates a low smoke effect similar to dry ice but without the wet residue.
- Quick/Extra Quick Dissipating Fluid: Dissipates 2x/4x as quickly as molecular fluid. Useful where smoke rising too quickly could be an issue. Also ideal to produce a burst of steam effect, nitrogen bursts etc.

Le Maitre's fluids are included in the "Equipment Based Guidelines for the Use of Theatrical Smoke and Haze" prepared by Environ International Corporation and can be used in compliance with ANSI standards for theatrical fog and the PLASA (previously ESTA) Fog Testing Program. Copies can be found on www.actorsequity.org.

Installation

- Orientation: Floor

Physical / Electrical

- Size (HxWxL): 610mmx 490mmx 635mm
- Weight: 17.5Kg
- Power: As per Smoke Machine


Product Codes:

Machine & Accessories

- | | |
|-------|------------------------------------------|
| 3001 | Freezefog Pro |
| 2911C | Freezefog 10' Flexible Aluminium Ducting |
| 2911E | Freezefog Tee Piece |

Fluids

- | | |
|------|------------------------------------|
| 2904 | Low Smoke Fluid (5L) |
| 2900 | Low Smoke Fluid (200L) |
| 2905 | Quick Dissipating Fluid (4x5L) |
| 2945 | Quick Dissipating Fluid (200L) |
| 2906 | Extra Quick Dissipating Fluid (5L) |

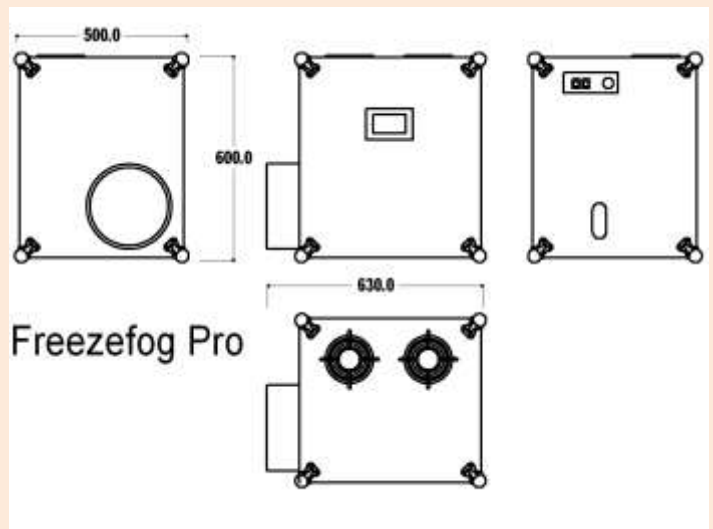

Specifications are subject to change without notice.



Le Maitre Ltd
5-6 Forval Close, Wandle Way,
Mitcham, Surrey CR4 4NE, UK
Tel: +44 208 6462222
www.lemaitreltd.com